

- Power Requirements** : 110/220V. 60/50Hz. AC (%±10) 24V. DC at standby
 -For Single-Sided: ~11W. max. ~60W.
 -For Double-Sided: ~22W. max. ~120W.
- Dimensions** : 1490 x 1220 x 2180 mm (Single-Sided)
 2210 x 1220 x 2180 mm (Double-Sided)
- Weight** : -For Single-Sided: ~ 300 kg. -For Double-Sided: ~ 585 kg.
- Arm Features** : Four-section (for double-sided a pair) rotors (120°). Each section contains nine (for double-sided ten) Ø42mmx2.5mm electrostatic powder coated (Opt. Hot dipped galvanized) or Ø40mm 304-Grade (Opt. 316-Grade) Stainless Steel (Opt. Ø38, Ø42 and Ø45mm) arms.
- Body Features** : Constructed on main carriers, supported by tube profiles on lateral panels, strengthened by separators.
 Material used is phosphate-coated steel, finish is electrostatic painted, stainless steel (304-Grade) or mixed combinations. (Opt. Hot dip galvanizing under the coating for outdoor models)
 Top cover is protected against water for outdoors installation.
 As an option, upright bars at the frame can comply with UK H&S Regulations (The gap between upright bars is less than 98 mm).
- Operating Temperature, Humidity, IP Rating, MCBF:** -20°C to +68°C (Opt. -50°C with heater unit)
 RH 95% non-condensing / IP 54 Outdoor Model (Opt. IP 56) / 1M Cycles
- Control System** : All inputs are opto-coupler protected .Controlled by dry contact or grounding input. Compatible with all access control systems that provide dry contact or grounding outputs. Optional RS232/RS485/TCP IP control module is available.
- Flow Rate** : - Passage Capacity of Mechanical unit for Manual Version=~ 60 passages/minute; Nominal=~10-25 people/minute (for double sided=*2) (Recommended reference figure)
 - Passage Capacity of Mechanical unit for Motorized Version=~60 passages/minute; Nominal=~10-25 people/minute (for double sided=*2) (Recommended reference figure)


❖ Please note that; the above given figures are approximate for one person per walkway or lane.

Explanatory Note: The system allows the new passage authorisation in less than ~0.3 seconds. After the passage authorization, the total passage time depends on the pushing and passage speed of the people.


❖ Utilisation of different access control units can change the flow rate.

System Features: See Operating Systems Specifications Table - **Page 6**


**Design and specifications are subject to change without notice.*

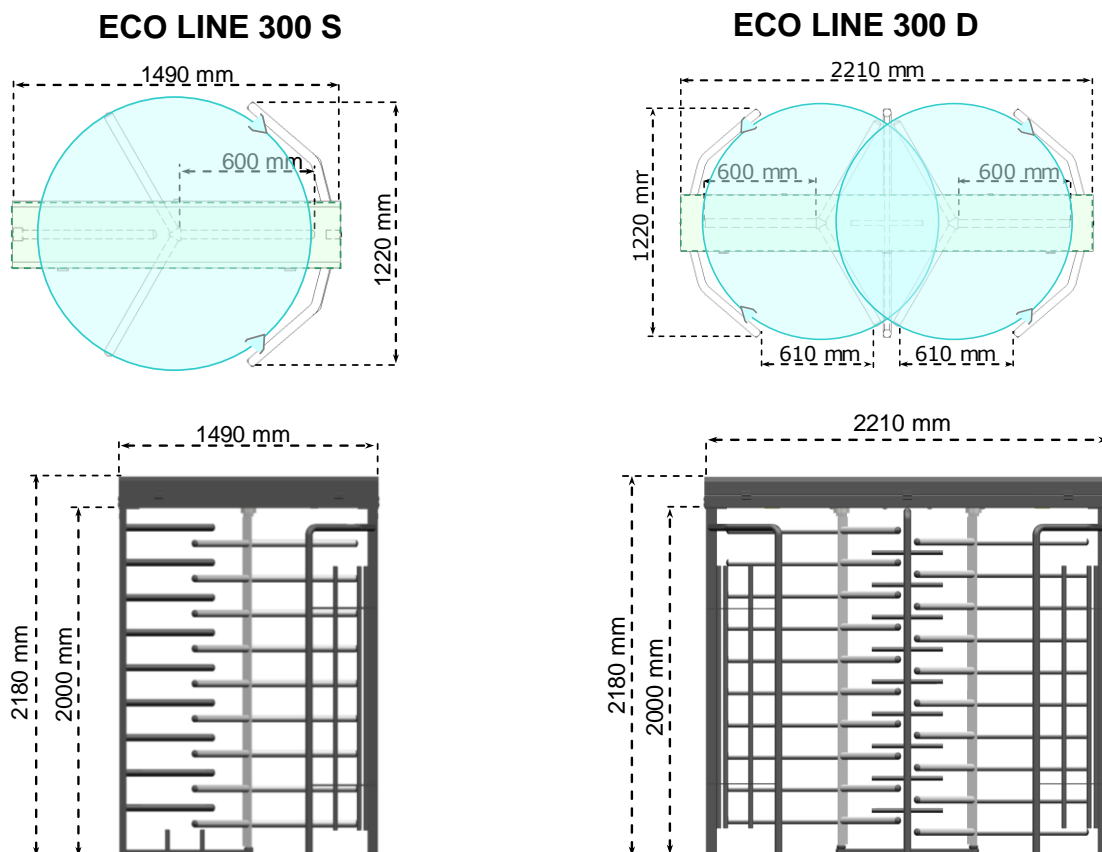


ECO LINE
300 S

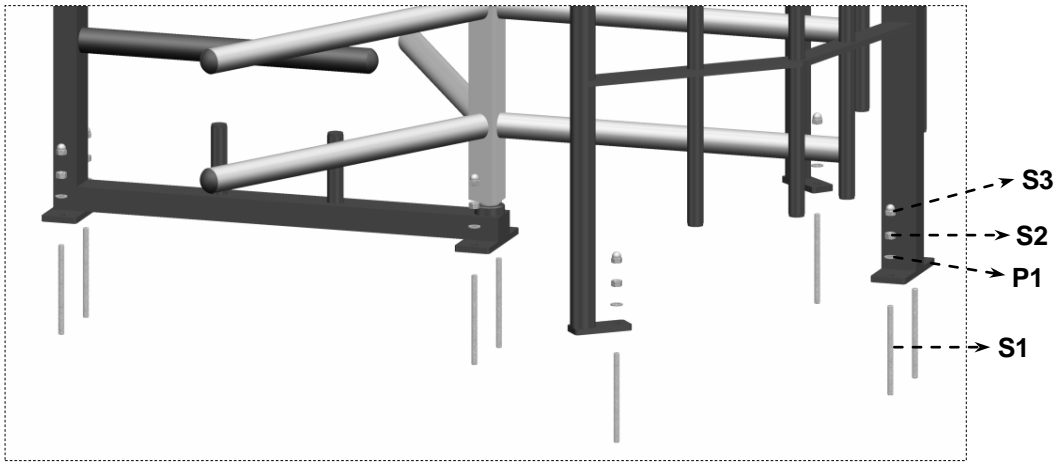


ECO LINE
300 D

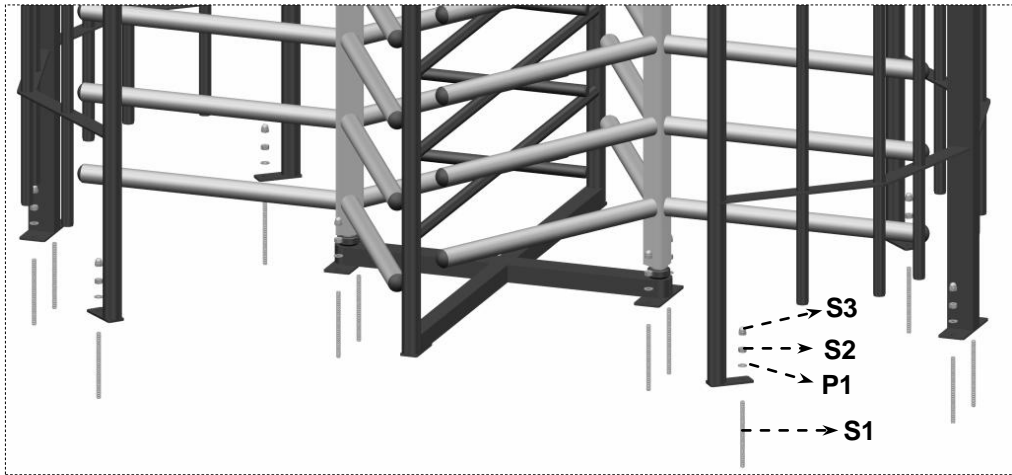


CORRECT

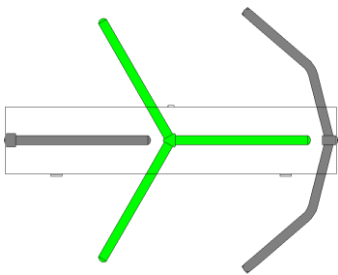


CORRECT

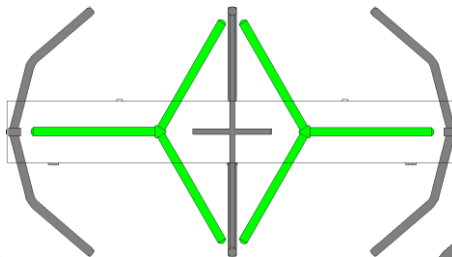



WRONG

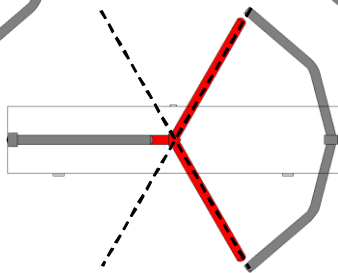

WRONG

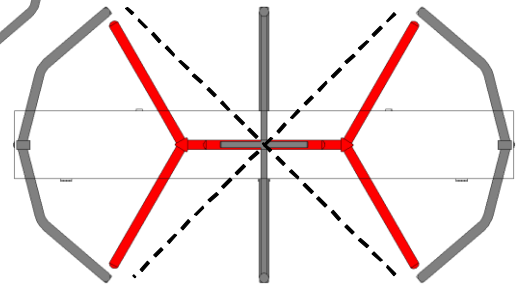

SECTIONS MARKED AS BLACK ARE CABLE PASSAGE AREAS.

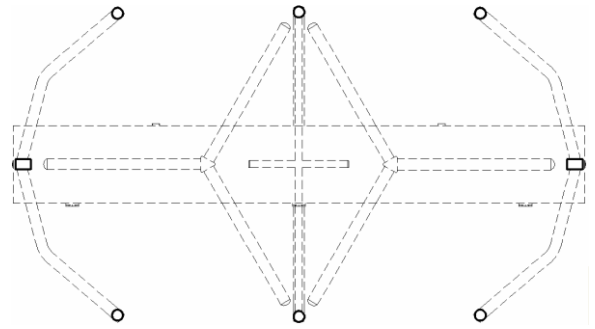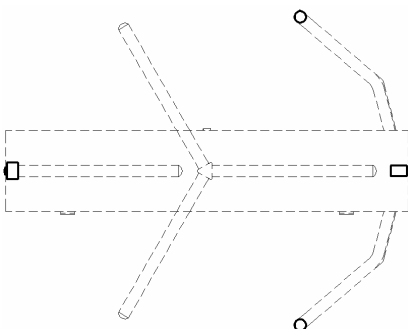

	P1	S1	S2	S3
	M10 Flat Washer	Ø10x150 Stud Bolt	M10 Nut	M10 Closed Nut
ECO 300-S	8	8	8	8
ECO 300-D	12	12	12	12